



KSA 200-4E



Centrifugal fans in heat-and sound-insulated casing

- Maximum airflow: 640
- Sound pressure level LpA at 3 m: 29.1
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	KSA 200-4E
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	115
Unit current	A	0.5
Maximum airflow	m ³ /h	640
Sound pressure level LpA at 3 m	dB(A)	29.1
Weight	kg	8.25
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX2
Ingress protection rating of the drive	-	IP44

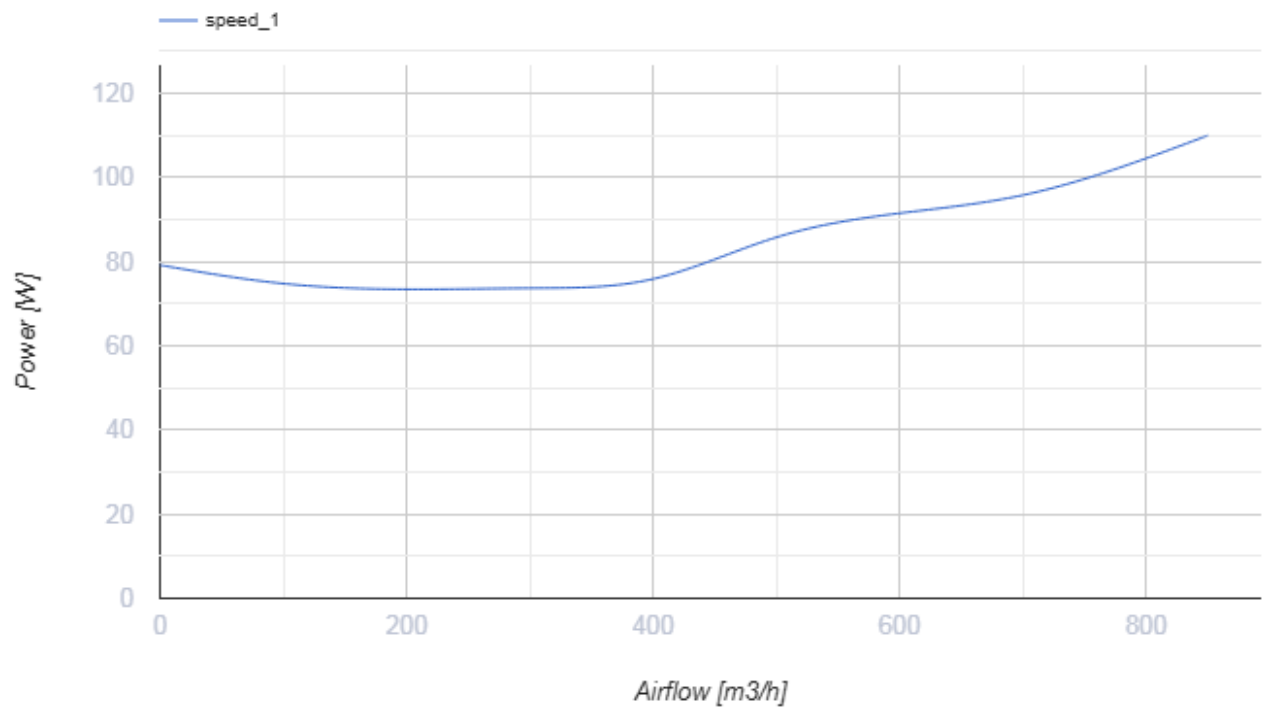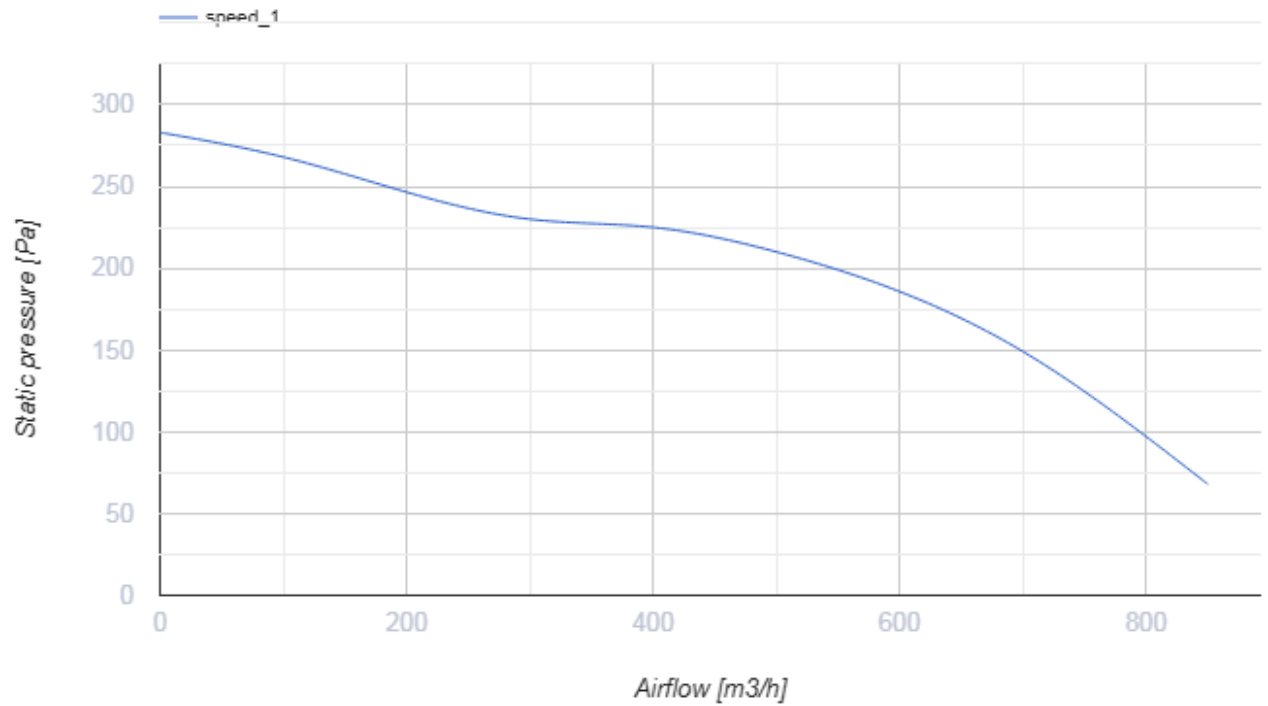

Dimensions

ØD	B	H	L	P
198	282	408	445	48

